


Residential Driveway Construction

Driveways per Ordinance #2423 shall have as a minimum, full depth transverse construction joints with pre-molded compressible filler totaling two (2) inches in width between the house and back of street curb. These transverse joints shall extend across the entire width of each driveway. Use one of the methods shown.

Questions? Contact the City Engineering Department at 636-477-6600, extension 1670.

Method #1

One – 2” wide joint in driveway at either end.

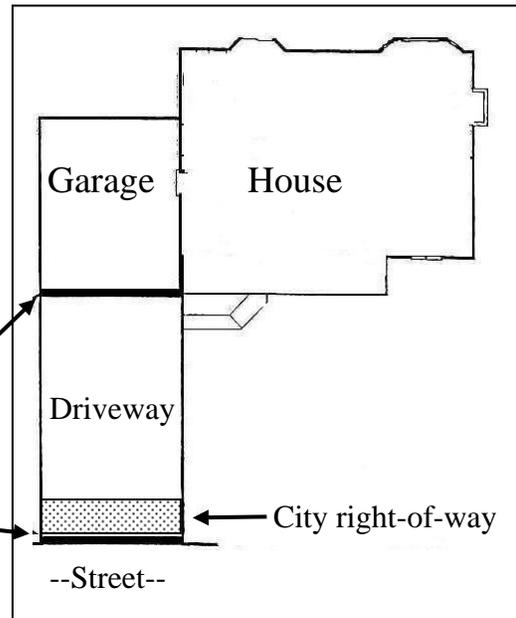

Be Advised:


The portion of the driveway in the City right-of way shall be a minimum of:

- Concrete - six (6) inches thick
- Type 5 Aggregate rock-base four (4) inches thick

Note: A typical residential right-of-way extends twelve feet back from the street.

Method #2

Two – 1” wide joints in driveway.

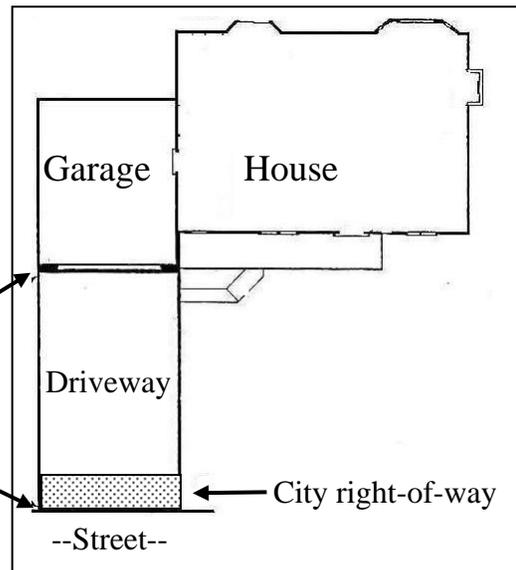

Method #3

Four – ½” wide joints equally spaced in driveway.

